


WAAS CH 77713 W06A	APP CRS 061°	Rwy Idg TDZE Apt Elev	4000 786 786
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

SENECA COUNTY (16G)

RNP APCH.				MISSED APPROACH: Climb to 2400 direct VOBRY and hold.
▼ ▲ NA Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cots ¼ SM and LNAV and Circling Cat C visibility ¼ SM.				
AWOS-3 127.175		FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 123.0 (CTAF) 0

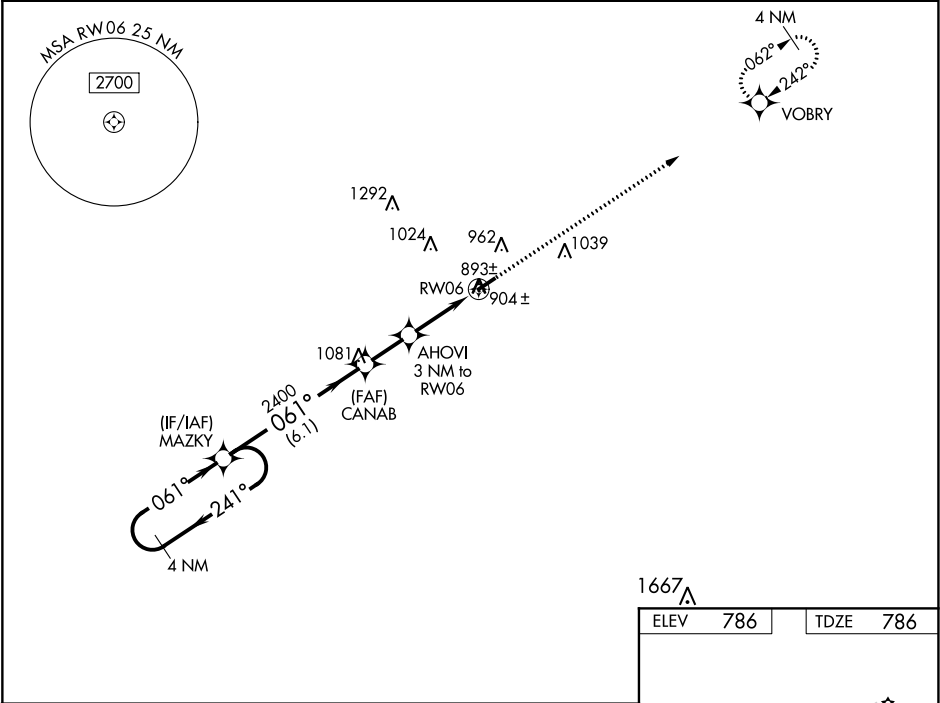

4 NM Holding Pattern		2400 VOBRY	
MAZKY		CANAB	
2400 ← 241° 061° → 2400		2400	
GP 3.00° TCH 38		*1780	
← 6.1 NM →		← 1.9 NM →	
		← 3 NM →	
CATEGORY	A	B	D
LPV DA	1137-1¼	351 (400-1¼)	NA
LNNAV/VNAV DA	1174-1½	388 (400-1½)	NA
LNNAV MDA	1160-1	374 (400-1)	NA
CIRCLING	1280-1	494 (500-1)	NA

