

LOC I-AIW 108.9	APP CRS 309°	Rwy Idg TDZE Apt Elev	9002 733 777
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 31
ARDMORE MUNI (ADM)

T Autopilot coupled approach NA below 1360. When local altimeter setting not received, use Ardmore Downtown Exec altimeter setting: increase DA to 1026 feet and all MDAs 40 feet.


A Inop table does not apply to S-LSL 31 all Cats, S-LOC 31 Cats A and B; UMEHU FIX MINIMUMS S-LOC 31 Cats A and B. When using Ardmore Downtown Exec altimeter setting, inop table does not apply to S-LSL 31 all Cats, S-LOC 31 Cats A and B; UMEHU FIX MINIMUMS S-LOC 31 Cats A and B. For inop ALS, increase UMEHU FIX MINIMUMS S-LOC 31 Cats C and D visibility to 1½ SM. When using Ardmore Downtown Exec altimeter setting, for inop ALS, increase UMEHU FIX MINIMUMS Cats C and D visibility to 1½ SM. Circling Rwy 13, 35 NA at night. Rwy 13, 35 helicopter visibility reduction below 1 SM NA. Rwy 31 helicopter visibility reduction below ¾ SM NA.

MALS



MISSED APPROACH:
Climb to 2000 then
climbing left turn to
3000 direct ADM
VORTAC and hold.

ATIS 125.6	FORT WORTH CENTER 124.75 323.0	ARDMORE TOWER ★ 118.5 (CTAF) 0 257.7	GND CON 121.8	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

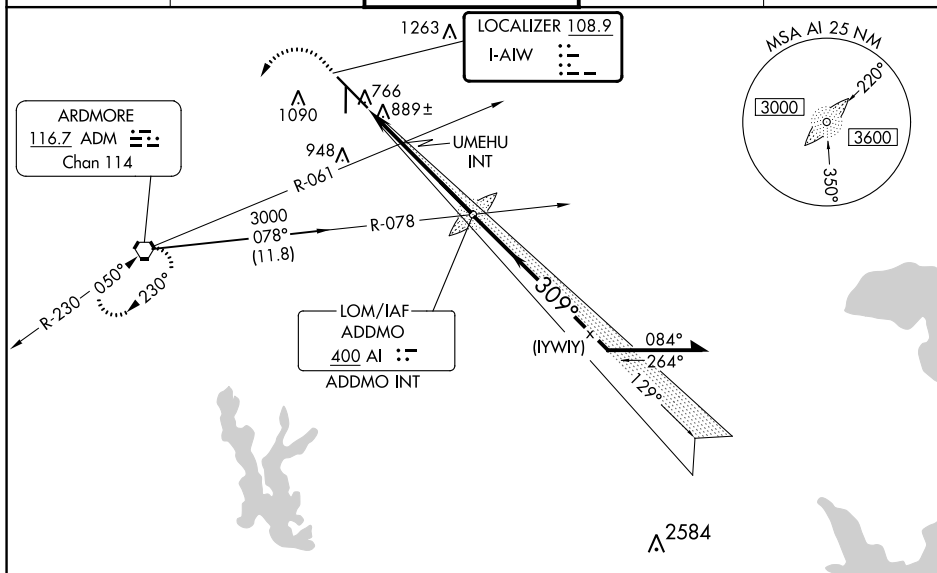

ELEV 777 D TDZE 733

HIRL Rwy 13-31
MIRL Rwy 17-35

2000

3000

ADM

† 1320 when using Ardmore Downtown Executive altimeter setting.
* LOC only.

AI LOM/INT 6000 129° 2520 309° 3000 2600 GS 3.00° TCH 49

CATEGORY	A	B	C	D
S-ILS 31	991-1		258 (300-1)	
S-LOC 31	1280-1	547 (600-1)	1280-1 $\frac{1}{8}$	547 (600-1 $\frac{1}{8}$)
CIRCLING	1380-1	1440-1	1460-2	1700-3
	603 (700-1)	663 (700-1)	683 (700-2)	923 (1000-3)

UMEHU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)

S-LOC 31	1140-1		407 (400-1)	
CIRCLING	1380-1	1440-1	1460-2	1700-3
	603 (700-1)	663 (700-1)	683 (700-2)	923 (1000-3)

ARDMORE, OKLAHOMA
Amdt 5D 09SEP21

34°18'N-97°01'W

ARDMORE MUNI (ADM)
ILS or LOC RWY 31