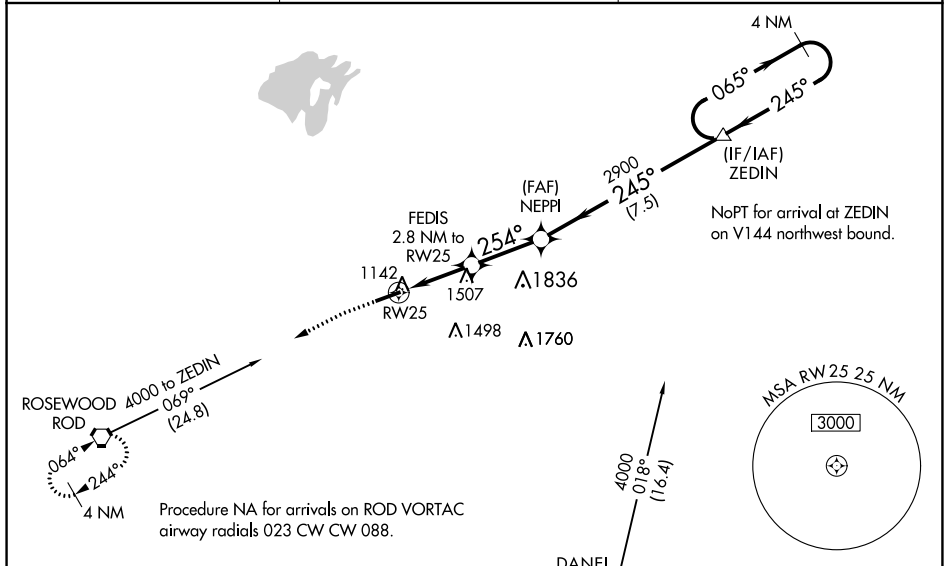


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>93628</b><br><b>W25A</b> | APP CRS<br><b>254°</b> | Rwy Idg <b>5000</b><br>TDZE <b>1122</b><br>Apt Elev <b>1122</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 25  
BELLEFONTAINE RGNL (EDJ)

|                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                             |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
|  | <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting and increase all DA 94 feet and increase all MDA 100 feet and increase LPV and LNAV/VNAV visibility all Cats ¾ mile and increase LNAV Cat B and Circling Cat B visibility ½ mile and increase LNAV Cats C and D visibility ½ mile and increase Circling Cat C visibility ½ mile and increase Circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting.</p> | <p><b>MISSED APPROACH:</b><br/>Climb to 1900 then climbing left turn to 3000 direct RD VORTAC and hold.</p> |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|

|                          |                                          |                                 |
|--------------------------|------------------------------------------|---------------------------------|
| AWOS-3<br><b>118.075</b> | COLUMBUS APP CON<br><b>118.425 294.5</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|------------------------------------------|---------------------------------|

[illegible]