

WAAS CH 81803 W29A	APP CRS 292°	Rwy Idg 9227 TDZE 333 Apt Elev 336
--	------------------------	---

RNAV (GPS) RWY 29R


FRESNO YOSEMITE INTL (FAT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.


ALSF-2

MISSED APPROACH: Climb to 2000 direct MORLA and hold.

ATIS 121.35 273.6	FRESNO APP CON 119.6 351.95	FRESNO TOWER 118.2 251.1	GND CON 121.7 348.6	CLNC DEL 124.35 348.6
-----------------------------	---------------------------------------	------------------------------------	-------------------------------	---------------------------------

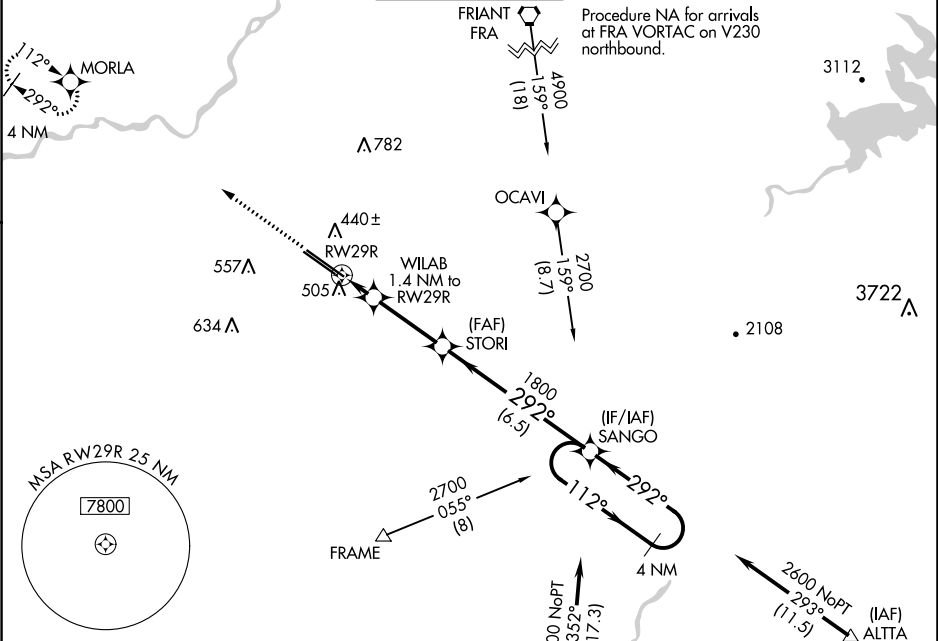

ELEV 336	D	TDZE 333
----------	---	----------

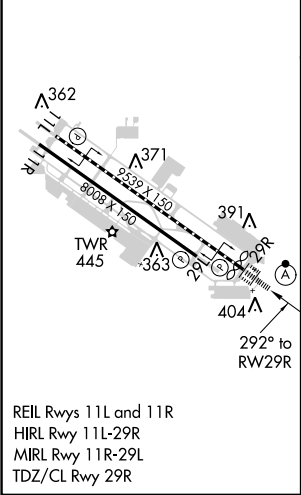

2000	MORLA	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 76).		4 NM
*LNAV only		STORI 1800		SANGO Holding Pattern
RWY 29R		WILAB 1.4 NM to RWY 29R		GP 3.00° TCH 58
292° to RWY 29R		292°		2600
1.4 NM		3 NM		6.5 NM
CATEGORY	A	B	C	D
LPV DA	533/18		200 (200-½)	
LNAV/VNAV DA	689/30		356 (400-¾)	
LNAV MDA	760/24	427 (500-½)	760/40	427 (500-¾)
CIRCLING	820-1	484 (500-1)	920-1½ 584 (600-1½)	920-2 584 (600-2)