

WAAS CH 56405 W25A	APP CRS 254°	Rwy Idg TDZE 812 Apt Elev 813
--	------------------------	---

RNAV (GPS) RWY 25

FINDLAY (F'DY)


RNP APCH-GPS.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. When local altimeter setting not received, use Lima Allen County altimeter setting: increase all DAs/MDAs 80 feet; increase LPV visibility 1⁄8 SM all Cats; increase LNAV Cat C/D and Circling Cat C/D visibility 1⁄4 SM. Circling Rwy 7 NA at night.

MISSED APPROACH:
Climb to 2500 direct PURIC and hold.

ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.725 (CTAF) 0
-----------------------	---------------------------------------	-----------------------------------

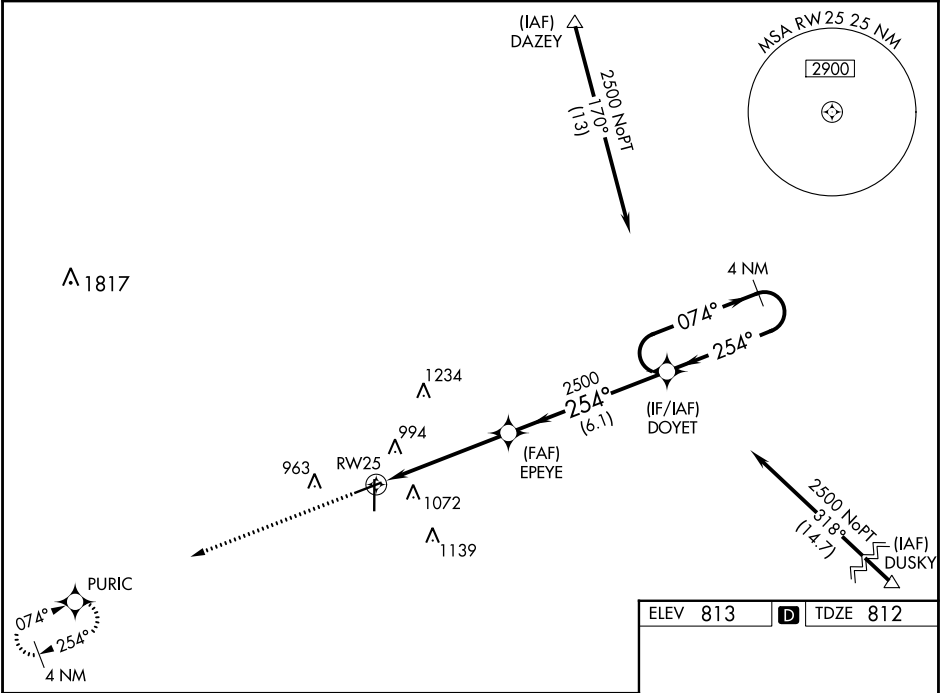

2500	PURIC	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 31).				4 NM Holding Pattern
*LNAV only		EPEYE 2500 DOYET 2500				GP 3.00° TCH 45
*1.4 NM to RW25		RW25 2500				
1.4 NM		3.7 NM	6.1 NM			
CATEGORY	A	B	C	D		
LPV DA	1116-1		304 (400-1)			
LNAV/VNAV DA	1411-2		599 (600-2)			
LNAV MDA	1280-1	468 (500-1)	1280-1 1⁄8 468 (500-1 1⁄8)	1280-1 1⁄2 468 (500-1 1⁄2)		
CIRCLING	1440-1	627 (700-1)	1440-1 3⁄4 627 (700-1 3⁄4)	1540-2 1⁄4 727 (800-2 1⁄4)		

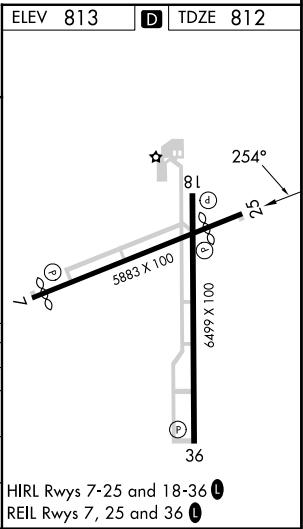

EC-2, 22 FEB 2024 to 21 MAR 2024

EC-2, 22 FEB 2024 to 21 MAR 2024