


▼

NA

Baro-VNAV NA. Use Lubbock altimeter setting. DME/DME RNP-0.3 NA.
Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 6000 direct FLATT and hold.

LBB ASOS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	UNICOM 122.8 (CTAF)
----------------------------------	---------------------------------------	-------------------------------

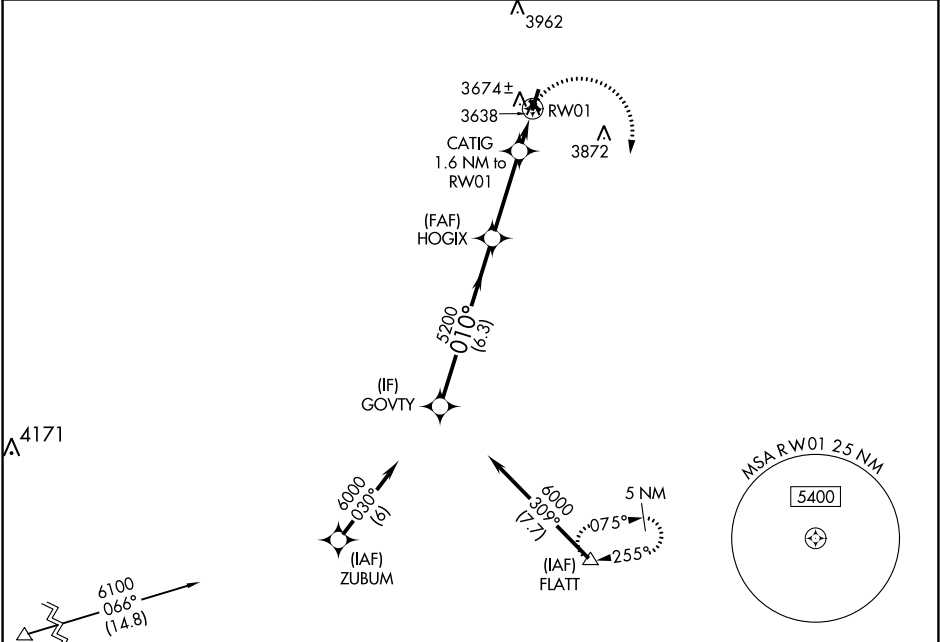

ELEV 3616		TDZE 3611	
GOVTY		FLATT	
6000		*LNAV only.	
GP 3.00° TCH 40		RWY 01	
6.3 NM		3.3 NM	
5200		*4160	
HOGIX		CATIG 1.6 NM to RWY 01	
5200		1.6 NM	
CATEGORY	A	B	C
LPV DA	3982-1¼	371 (400-1¼)	NA
LNAV/VNAV DA	3982-1¼	371 (400-1¼)	NA
LNAV MDA	4060-1	449 (500-1)	NA
CIRCLING	4100-1 484 (500-1)	4240-1 624 (700-1)	NA

