


WAAS CH 86834 W29A	APP CRS 293°	Rwy Idg TDZE 5047 Apt Elev 5055
--	------------------------	---

RNAV (GPS) RWY 29
VANCE BRAND (LMO)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, procedure NA below -25°C or above 54°C.	MISSED APPROACH: Climb to 5540 then climbing right turn to 7400 direct NIWOT and hold, continue climb-in-hold to 7400.
---	--

AWOS-3 120.0	DENVER APP CON 125.12 263.02	UNICOM 122.975 (CTAF) ①
------------------------	--	-----------------------------------

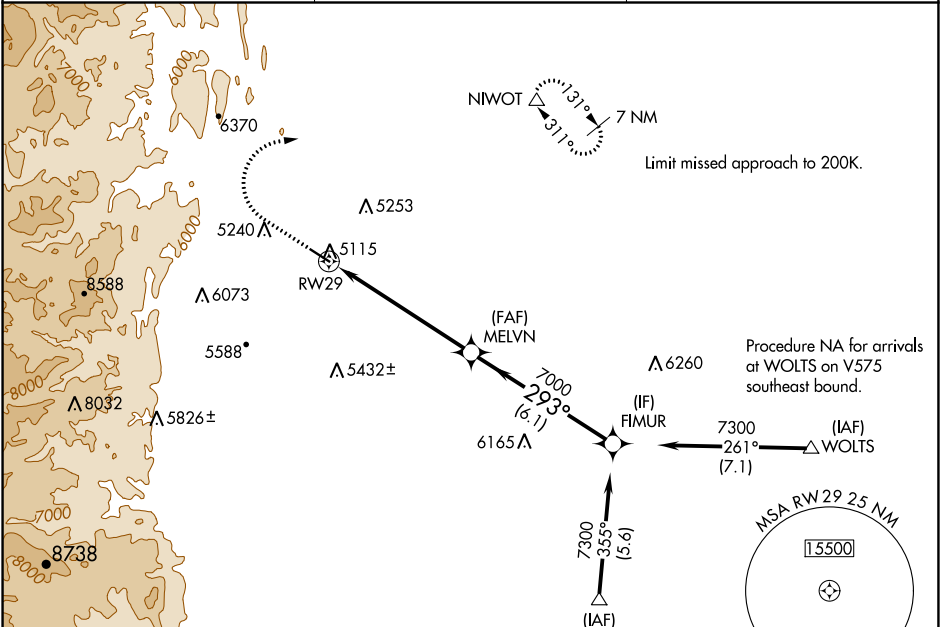

ELEV 5055	TDZE 5047
-----------	-----------

Procedure NA for arrivals at FIPSS on V85 southeast bound.

	5540 7400 NIWOT			
	* LNAV only			
	* 2.3 NM to RWY 29			
	GP 3.00° TCH 35			
	2.3 NM 3.8 NM 6.1 NM			
CATEGORY	A	B	C	D
LPV DA	5338-7/8 291 (300-7/8)			
LNAV/VNAV DA	5387-1 340 (400-1)			
LNAV MDA	5800-1 753 (800-1)	5800-1¼ 753 (800-1¼)	5800-2 753 (800-2)	
CIRCLING	5800-1 745 (800-1)	5800-1¼ 745 (800-1¼)	5860-2¼ 805 (900-2¼)	6480-3 1425 (1500-3)

VANCE BRAND (LMO)
RNAV (GPS) RWY 29

SW-1, 22 FEB 2024 to 21 MAR 2024

SW-1, 22 FEB 2024 to 21 MAR 2024

APP CRS	Rwy Idg	N/A
346°	TDZE	N/A
	Apt Elev	5055

RNAV (GPS)-B



VANCE BRAND (LMO)

⚠

When local alimeter setting not received, use Denver Intl alimeter setting and increase all MDA 120 feet; and increase Cat C/D visibility ¼ mile.
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climbing right turn to 7200 direct GLL VOR/DME and hold.

AWOS-3 120.0	DENVER APP CON 125.12 263.02	UNICOM 122.975 (CTAF) 0
-----------------	---------------------------------	----------------------------

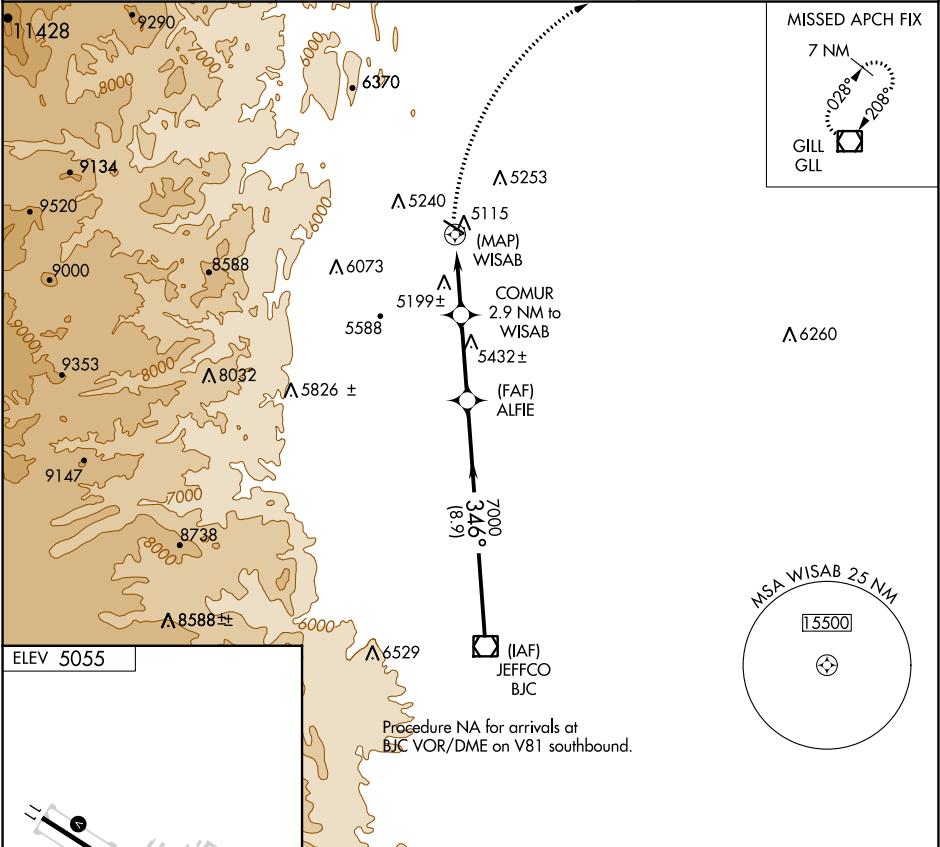

7200	GLL	COMUR 2.9 NM to WISAB	ALFIE	BJC VOR/DME
		WISAB		
		6020	7000	9200
		2.9 NM	3.1 NM	8.9 NM
CATEGORY	A	B	C	D
CIRCLING	5560-1 505 (600-1)	5580-1 525 (600-1)	5880-2½ 825 (900-2½)	6500-3 1445 (1500-3)

VOR/DME BJC	APP CRS	Rwy Idg	N/A
115.4	345°	TDZE	N/A
Chan 101		Apt Elev	5055

VOR/DME-A



VANCE BRAND (LMO)

⚠

When local altimeter setting not received, use Denver Intl altimeter setting and increase all MDA 120 feet; and increase Cat C visibility ½ mile and Cat D ¼ mile.

MISSED APPROACH: Climbing right turn to 7000 direct GLL VOR/DME and hold.

AWOS-3 120.0	DENVER APP CON 125.12 263.02	UNICOM 122.975 (CTAF) 0
-----------------	---------------------------------	----------------------------

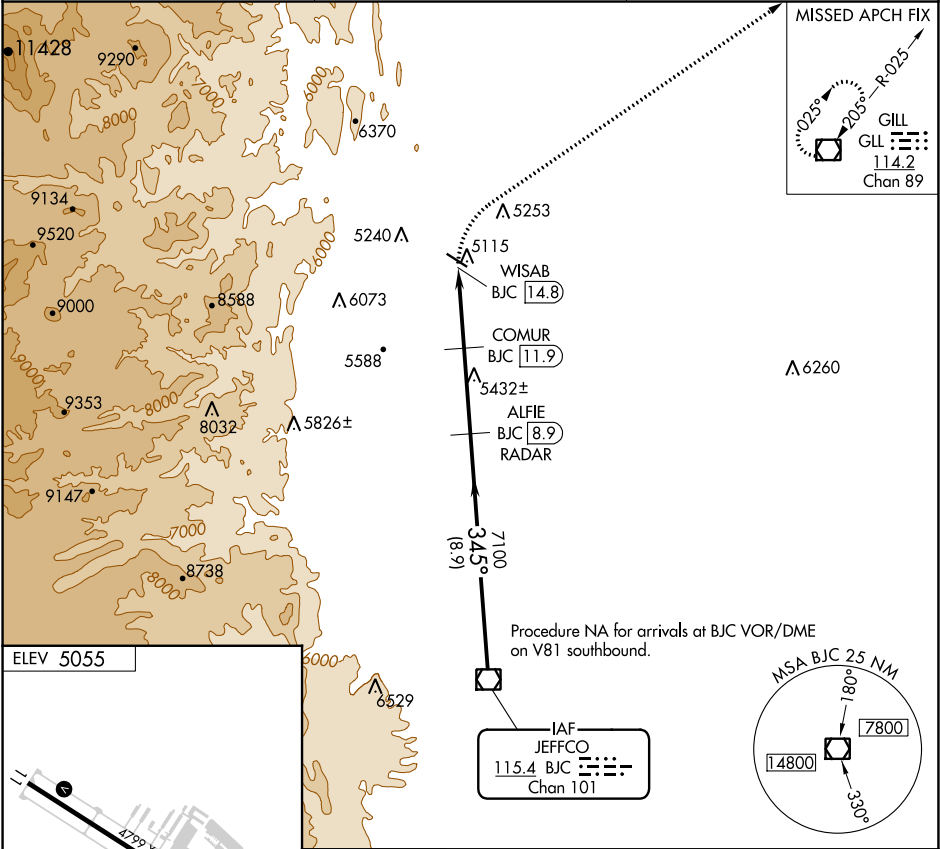

7000	GLL	ALFIE BJC 8.9 RADAR	BJC VOR/DME
WISAB BJC 14.8	COMUR BJC 11.9	7100	9200
2.9 NM	3.1 NM	8.9 NM	
CATEGORY	A	B	C
CIRCLING	5640-1	585 (600-1)	5880-2½ 825 (900-2½)
			6500-3 1445 (1500-3)