

WAAS CH 93732 W32A	APP CRS 322°	Rwy Idg TDZE 1130 Apt Elev 1136
--	------------------------	---

RNAV (GPS) RWY 32

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)


RNP APCH-GPS.

⚠

Circling NA to Rwy 4 and 22. Baro-VNAV and VDP NA when using Benson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Benson altimeter setting and increase LPV DA to 1388 feet and LNAV/VNAV DA to 1477 feet. Increase all MDAs 60 feet and visibility LNAV Cat C 1/8 SM and visibility Circling Cat C 1/4 SM.

MISSED APPROACH: Climb to 3000 direct ZITOG and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

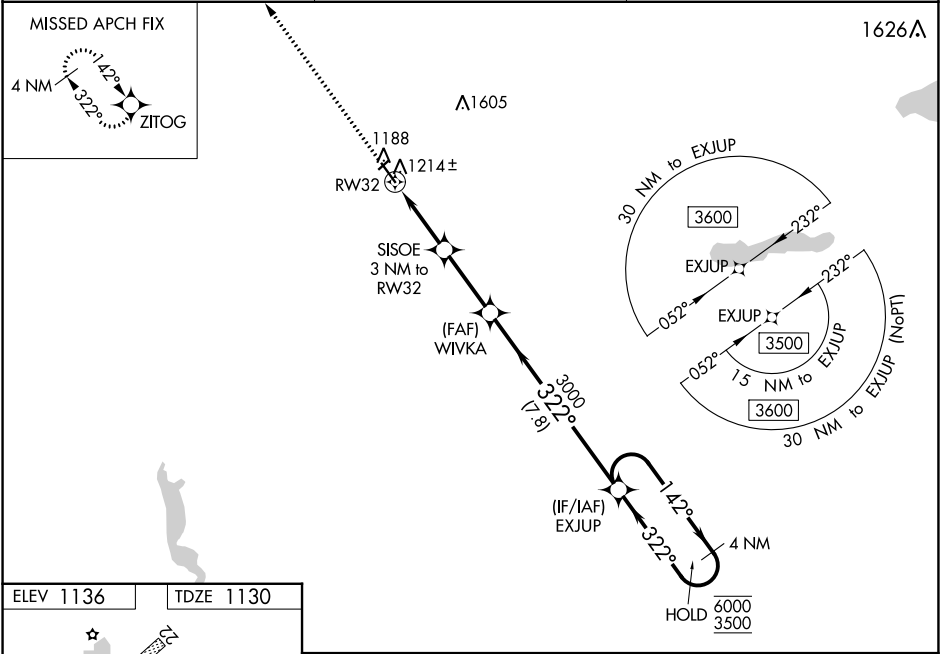

CATEGORY	A	B	C	D
LPV DA	1330-1	200 (200-1)		NA
LNAV/VNAV DA	1419-1	289 (300-1)		NA
LNAV MDA	1480-1	350 (400-1)		NA
CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024

MORRIS, MINNESOTA

AL-5621 (FAA)

23054

VOR/DME MOX 109.6 Chan 33	APP CRS 144°	Rwy Idg 4899 TDZE 1132 Apt Elev 1136
---	------------------------	---

VOR RWY 14





MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

T	Circling NA to Rwy 4 and 22. VDP NA when using Benson altimeter setting. When local altimeter setting not received, use Benson altimeter setting and increase all MDAs 60 feet and increase S-14 and Circling visibility Cat C $\frac{1}{4}$ SM.
A NA	

MISSED APPROACH: Climb to 3000 then left turn direct MOX VOR/DME and hold.

AWOS-3PT
118.6

MINNEAPOLIS CENTER
126.1 269.2

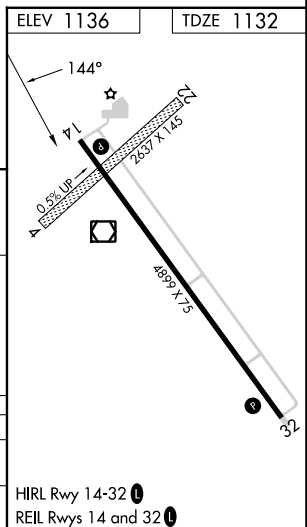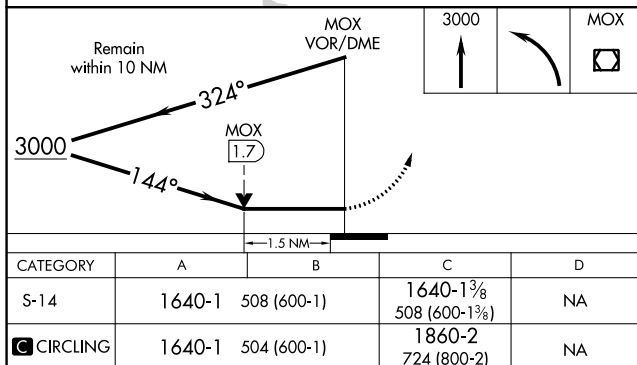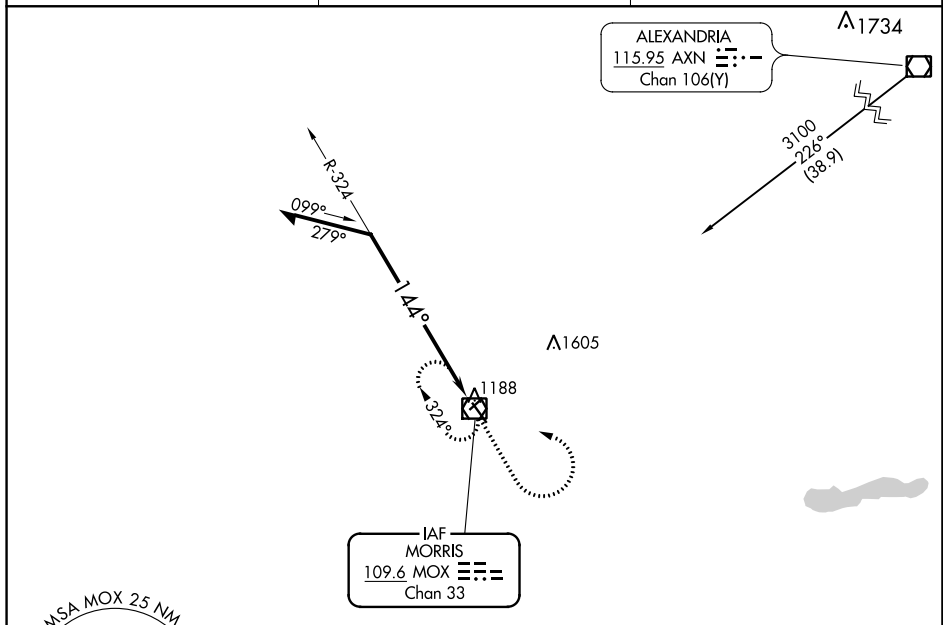UNICOM
122.8 (CTAF) 

MORRIS, MINNESOTA

Amdt 2 08SEP22

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

45°34'N-95°58'W

VOR RWY 14

NC-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME MOX 109.6 Chan 33	APP CRS 315°	Rwy Idg TDZE 1130 Apt Elev 1136
---	------------------------	---





VOR RWY 32

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)



⚠ Circling NA to Rwys 4 and 22. VDP NA when using Benson altimeter setting.
⚠ NA When local altimeter setting not received, use Benson altimeter setting and increase all MDAs 60 feet and increase S-32 visibility Cat C ¼ SM and Circling visibility Cat C ¼ SM; increase JEXIR fix minimums S-32 and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 then left turn direct MOX VOR/DME and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

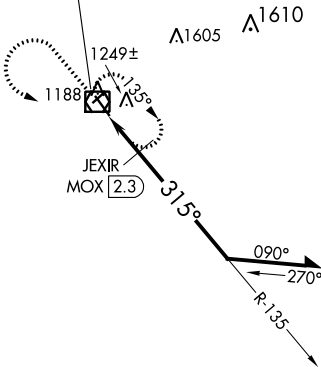

ELEV 1136	TDZE 1130
-----------	-----------

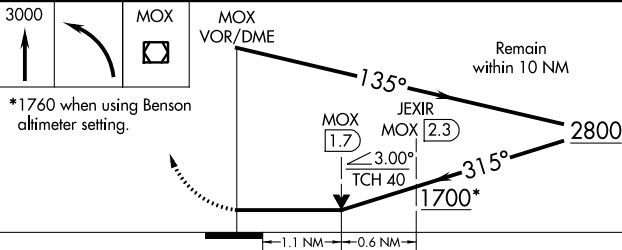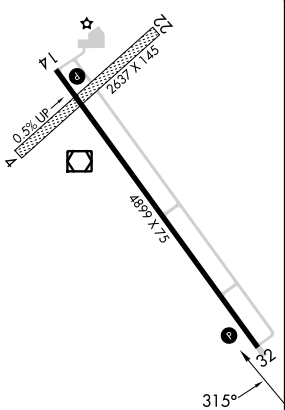

CATEGORY	A	B	C	D
S-32	1700-1	570 (600-1)	1700-1½ 570 (600-1½)	NA
C CIRCLING	1700-1	564 (600-1)	1860-2 724 (800-2)	NA
JEXIR FIX MINIMUMS				
S-32	1500-1	370 (400-1)		NA
C CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA