


ATIS ★ 134.925 269.9		RADAR required		Rwy	Knots	60	120	180	240	300	360
CLNC DEL				† 3 L/R	ⓐ V/V(fpm)	336	672	1008	1344	1680	2016
126.25 273.475				* 21 L/R	ⓑ V/V(fpm)	480	960	1440	1920	2400	2880
GND CON											
133.175 335.8											
TOWER ★											
119.1 379.9											
DEP CON											
118.15 363.125											

★ Minimum † ATC Climb Rate

ⓐ to 12,000

ⓑ to 6000

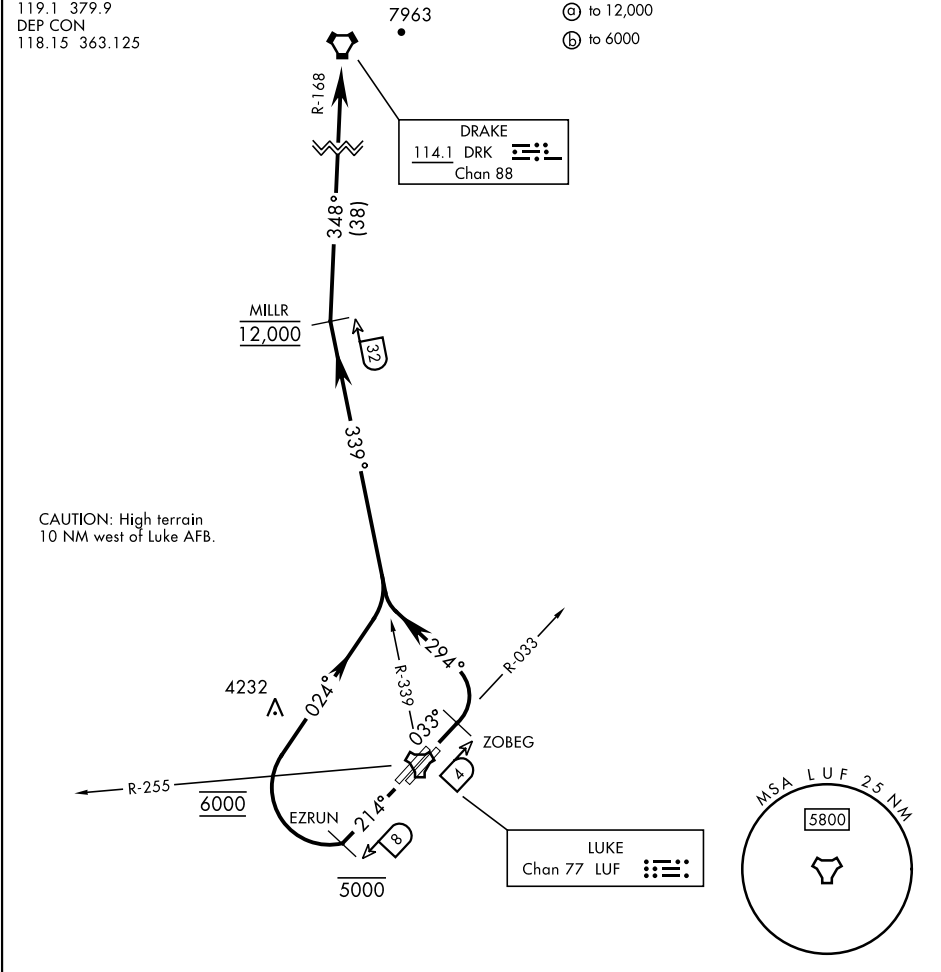

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3 L/R: Climb heading 033° to 12,000. Abeam ZOBEG turn left heading 294° to intercept and proceed via LUF TACAN R-339 outbound to MILLR then via DRK VORTAC R-168 to DRK. Cross MILLR at 12,000 or as assigned by ATC.

TAKEOFF RWY 21 L/R: Climb heading 214° to 5000. Abeam EZRUN turn right heading 024° to intercept and proceed via LUF TACAN R-339 outbound to MILLR then via DRK VORTAC R-168 to DRK. Cross EZRUN at or below 5000. Cross LUF R-255 at 6000. Climb and maintain 12,000 until MILLR or as assigned by ATC.

SW-4, 22 FEB 2024 to 21 MAR 2024

SW-4, 22 FEB 2024 to 21 MAR 2024