

APP CRS	Rwy Idg	9802
176°	TDZE	1287
	Apt Elev	1296

RNAV (RNP) Z RWY 17L

WILL ROGERS WORLD (OKC)


ASR


For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 17R.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH:
Climb to 5000 on track 176° to JAVXE and hold, continue climb-in-hold to 5000.

D-ATIS	OKC CITY APP CON	ROGERS TOWER	GND CON	CNLC DEL
125.85	124.6 266.8	119.35 269.45	121.9 348.6	124.35

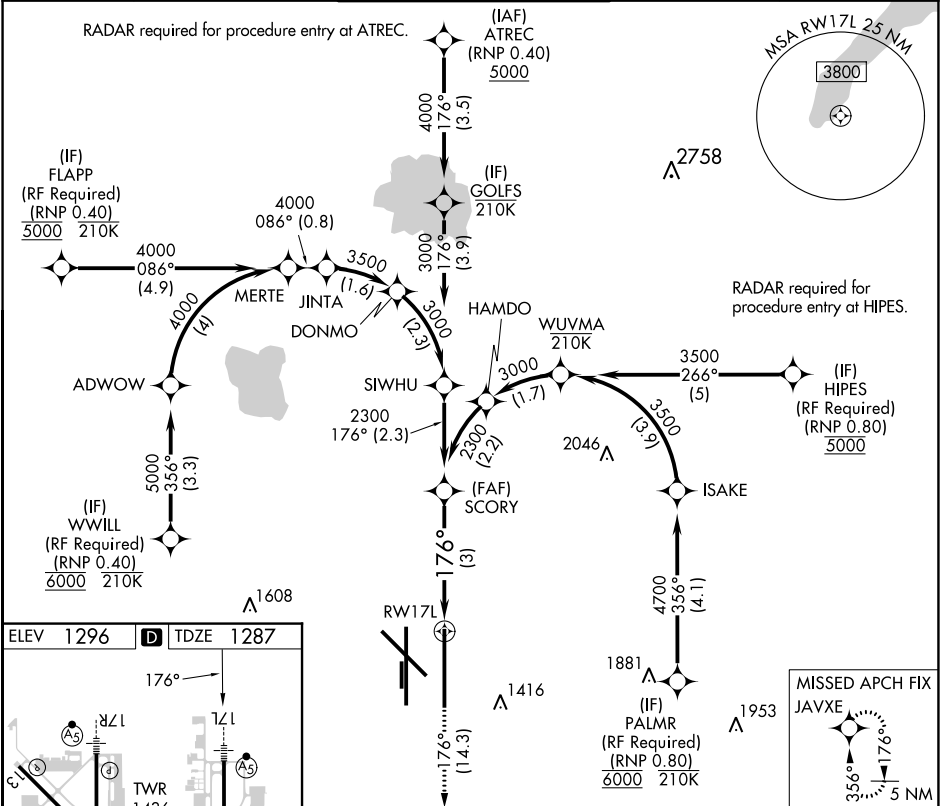

5000 ↑	tr 176°	JAVXE 	See planview for multiple IF locations.	SCORY 2300
				
CATEGORY	A	B	C	D
RNP 0.11 DA	1555/24 268 (300-½)			
RNP 0.20 DA	1643/34 356 (400-¾)			
RNP 0.30 DA	1724/49 437 (500-1)			
AUTHORIZATION REQUIRED				