

WAAS CH 82434 W01A	APP CRS 011°	Rwy Idg 3992 TDZE 19 Apt Elev 19
--	------------------------	---

RNAV (GPS) RWY 1

POINT HOPE (PHO) (PAPO)

⚠


NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, procedure NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH:

Climb to 800 then climbing right turn to 3300 direct COPOX and hold.

AWOS-3P 118.325	ANCHORAGE CENTER 119.65 363.25	KOTZEBUE RADIO 122.25	CTAF 122.8 0
---------------------------	--	---------------------------------	------------------------

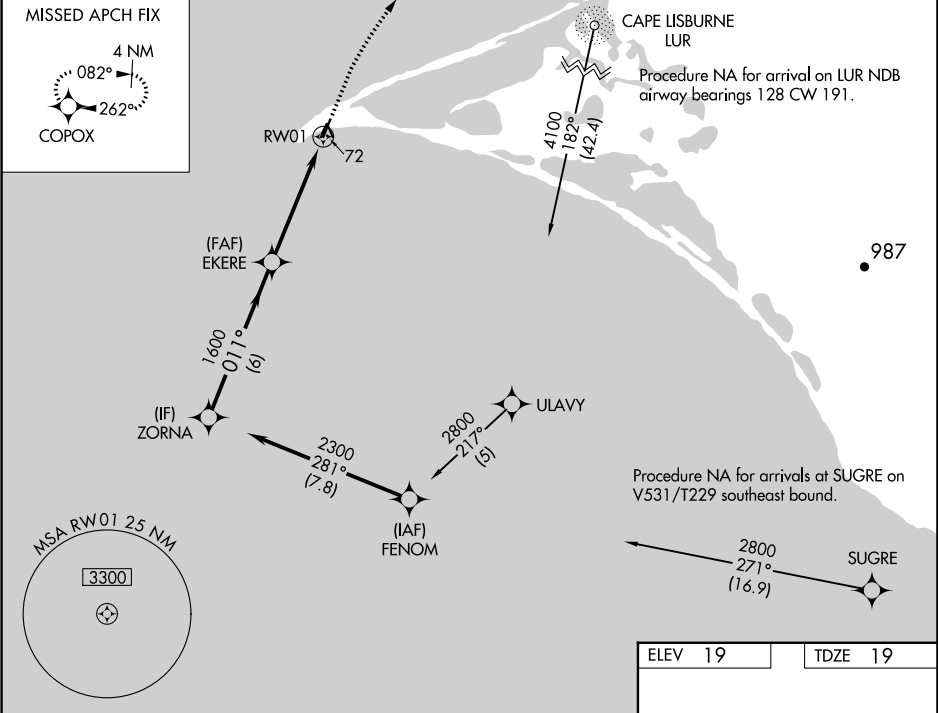

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).				
ZORNA				
2300	011°	1600	800	3300 COPOX
* 0.9 NM to RW01				
* LNAV only.				
GP 3.00° TCH 40	6 NM	3.9 NM	0.9	
CATEGORY	A	B	C	D
LPV DA	269-1 250 (300-1)			
LNAV/ VNAV DA	269-1 250 (300-1)			
LNAV MDA	340-1 321 (400-1)			
CIRCLING	380-1 361 (400-1)	480-1 461 (500-1)	480-1½ 461 (500-1½)	580-2 561 (600-2)

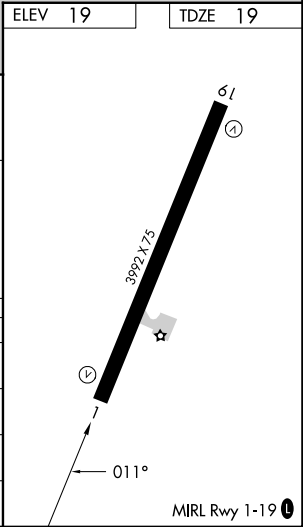



WAAS CH 63034 W19A	APP CRS 191°	Rwy Idg 3992 TDZE 19 Apt Elev 19
--	------------------------	---

RNAV (GPS) RWY 19

POINT HOPE (PHO) (PAPO)

▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, procedure NA. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 700 then climbing left turn to 2800 direct FENOM and hold.
--	--

AWOS-3P 118.325	ANCHORAGE CENTER 119.65 363.25	KOTZEBUE RADIO 122.25	CTAF 122.8
---------------------------	--	---------------------------------	----------------------

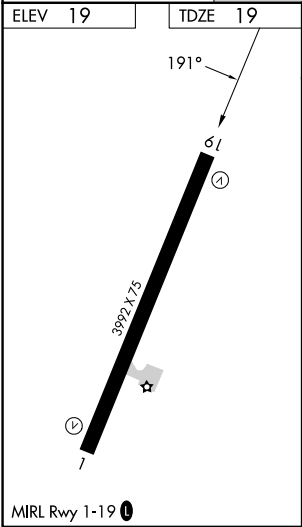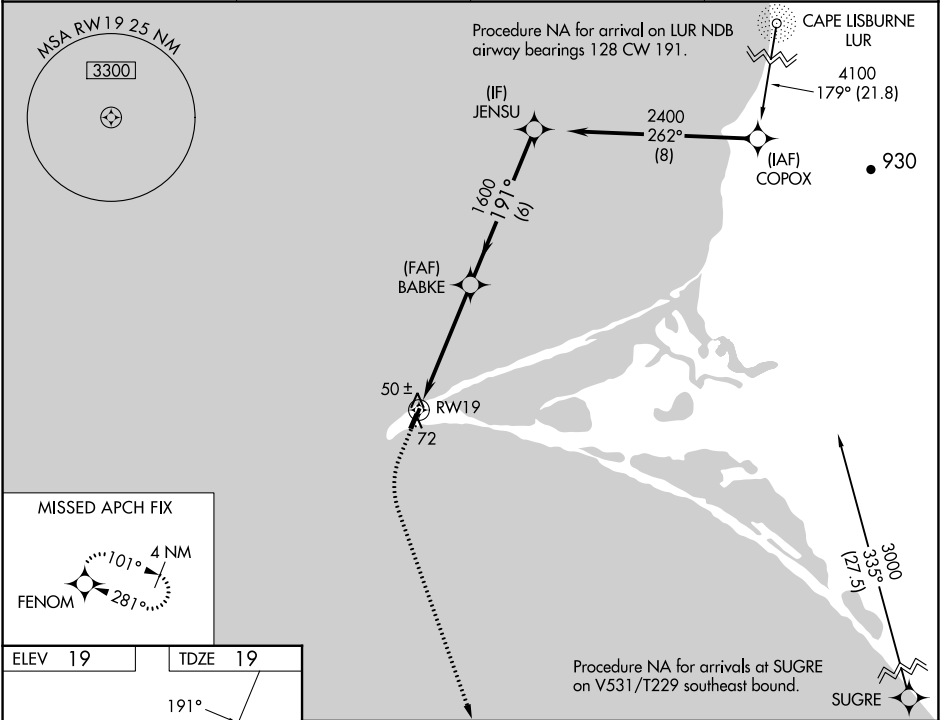

700		2800		FENOM		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 27°).	
						JENSU	
*LNAV only		*0.9 NM to RW19		BABKE		2400	
						GP 3.00° TCH 40	
CATEGORY	A		B		C		D
LPV DA	269-1		250 (300-1)				
LNAV/ VNAV DA	269-1		250 (300-1)				
LNAV MDA	360-1		341 (400-1)				
CIRCLING	380-1 361 (400-1)		480-1 461 (500-1)		480-1½ 461 (500-1½)		580-2 561 (600-2)