


WAAS CH 86620 W36A	APP CRS 358°	Rwy Idg 5998 TDZE 202 Apt Elev 206
--	------------------------	---

RNAV (GPS) RWY 36
PINEBLUFF RGNL/GRIDER FLD (PBF)

Baro-VNAV NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Stuttgart altimeter setting; increase LPV DA to 527 feet; increase LNAV/VNAV DA to 562 feet and visibility all Cats ½ SM; increase all MDA 80 feet and LNAV and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct PAYIT and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

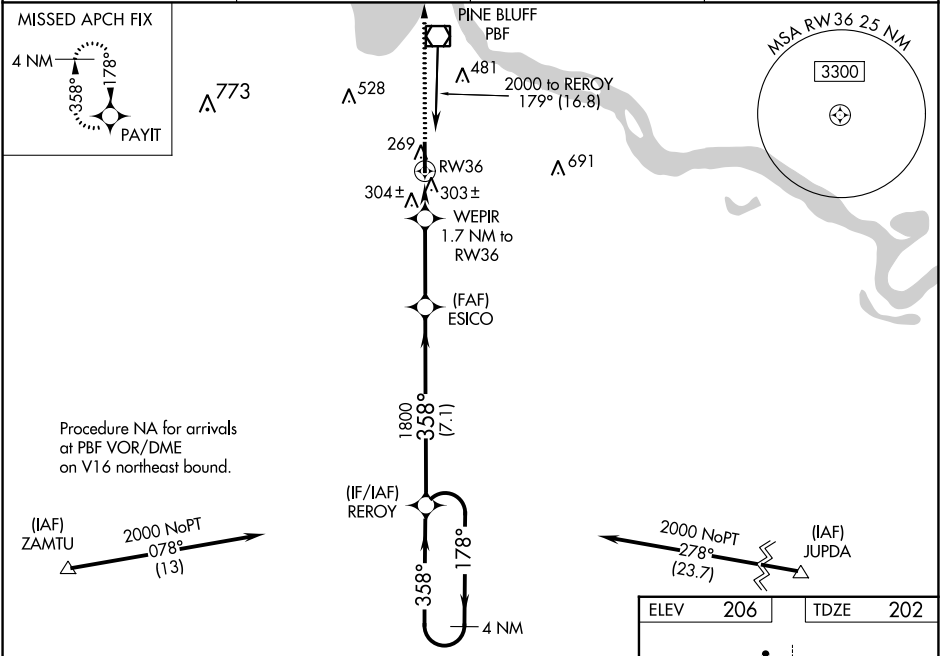

2000

↑

PAYIT

✦

*LNAV only.

WEPIR

1.7 NM to RW36

ESICO

1800

REROY

4 NM Holding Pattern

178°

→

2000

←

358°

GP 3.00°

TCH 52

1.7 NM

3.2 NM

7.1 NM

358°


1800

*780

RW36

↻

CATEGORY	A	B	C	D
LPV DA	452-1 250 (300-1)			
LNAV/VNAV DA	487-1 285 (300-1)			
LNAV MDA	600-1 398 (400-1)		600-1½ 398 (400-1½)	
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1¾ 634 (700-1¾)	880-2¼ 674 (700-2¼)

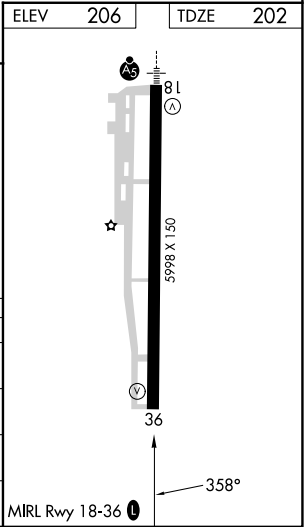

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024