


WAAS CH 70531 W08A	APP CRS 080°	Rwy Idg TDZE 4671 Apt Elev 4729
--	------------------------	---

RNAV (GPS) RWY 8R

PUEBLO MEML (PUB)

RNP APCH-GPS.			MALSR	MISSED APPROACH: Climb to 7000 direct HELER and hold.		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to ¾ SM.						
ATIS 125.25	DENVER APP CON ★ 120.1 290.5	PUEBLO TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 120.9	UNICOM 122.95	

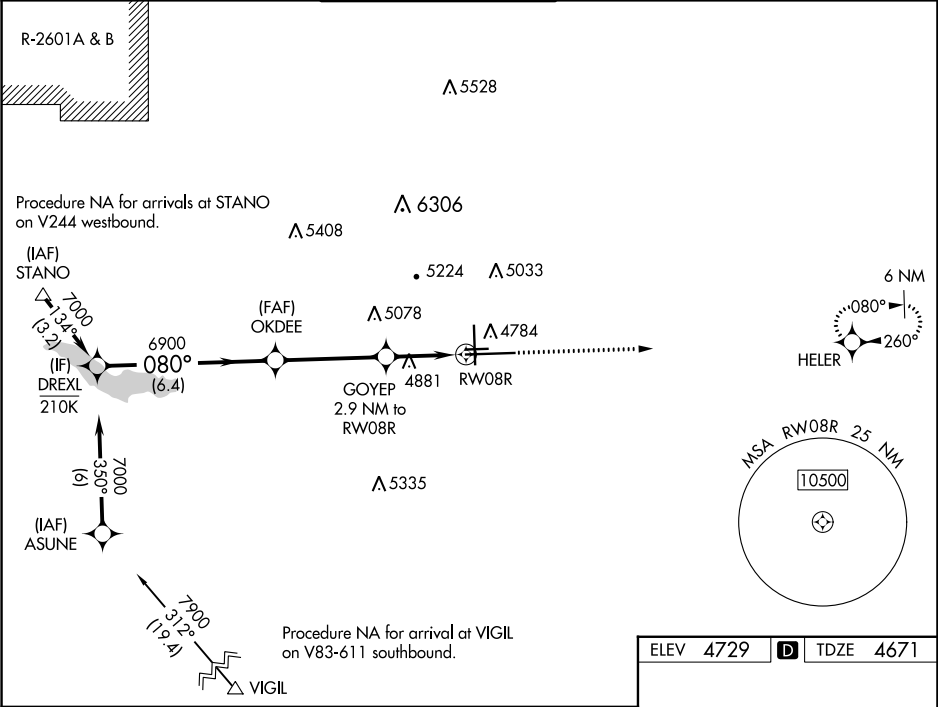

DREXL		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 63).		7000	HELER
7000		080°		6900	
GP 3.00° TCH 60		OKDEE		GOYEP 2.9 NM to RW08R	*LNAV only
6.4 NM		4 NM		1.4 NM	1.5 NM to RW08R
CATEGORY		A		B	
LPV DA		4871-½		200 (200-½)	
LNAV/VNAV DA		4982-½		311 (300-½)	
LNAV MDA		5200-½		529 (500-½)	
CIRCLING		5340-1		611 (700-1)	
		5580-2½		851 (900-2½)	
		5800-3		1071 (1100-3)	

