


WAAS CH 53406 W26A	APP CRS 258°	Rwy Idg 12197 TDZE 932 Apt Elev 944
--	------------------------	--

RNAV (GPS) Y RWY 26R

ONTARIO INTL (ONT)

RNP APCH - GPS. ▼ Circling NA north of Rwy 8L-26R. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C.			ALSF-2 	MISSED APPROACH: Climb to 4700 direct ENSLY and on track 170° to MAHOY and on track 083° to PDZ VORTAC and hold, continue climb-in-hold to 4700.		
D-ATIS 124.25	SOCAL APP CON 127.0 318.2	ONTARIO TOWER 120.6 360.775	GND CON 121.9 257.8	CLNC DEL 118.1	CPDLC	

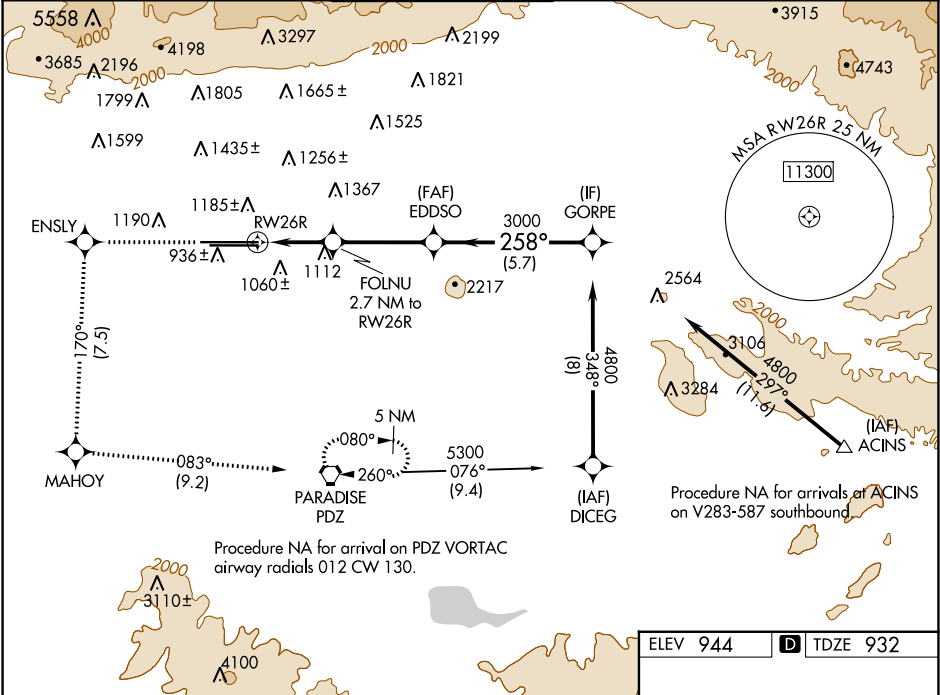

4700	ENSLY	tr 170°	MAHOY	tr 083°	PDZ	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		
						EDDSO	GORPE	
						3000	4800	
							258°	
							3000	
							GP 3.00°	
							TCH 60	
CATEGORY		A		B		C		D
LPV	DA	1132/18 200 (200-½)						
LNAV/VNAV	DA	1267/55 335 (400-1)						
LNAV	MDA	1380/24 448 (500-½)				1380/45 448 (500-¾)		
	CIRCLING	1400-1 456 (500-1)				1500-1½ 556 (600-1½)		1540-2 596 (600-2)

