
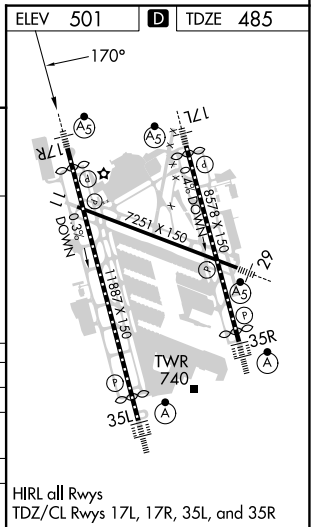
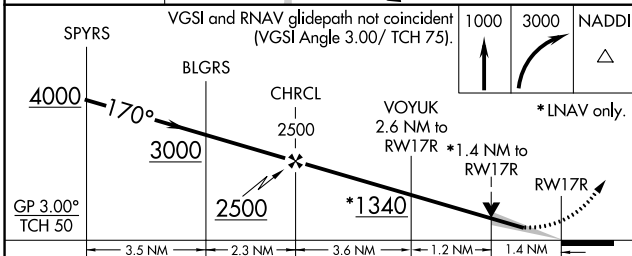


WAAS CH <b>57909</b> <b>W17A</b>	APP CRS <b>170°</b>	Rwy ldg <b>10000</b> TDZE <b>485</b> Apt Elev <b>501</b>
--	------------------------	--

# RNAV (GPS) Y RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH.				MALSR		MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct NADDI and hold.	
<p><b>⚠</b> Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV Cats C/D required to 1½ SM.</p>							
D-ATIS <b>118.725</b>	LOUISVILLE APP CON <b>132.075 327.0</b>	LOUISVILLE TOWER <b>124.2 257.8</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>126.1 275.8</b>	CPDLC		

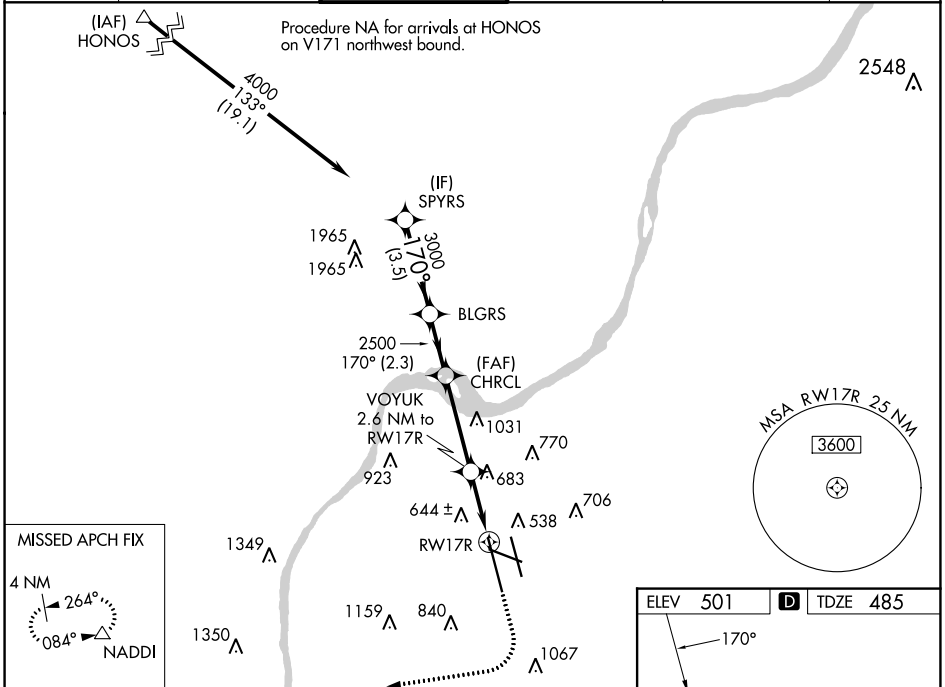

CATEGORY	A	B	C	D
LPV DA		685/18	200 (200-½)	
LNAV/VNAV DA		932/55	447 (500-1)	
LNAV MDA	1000/24	515 (500-½)	1000/55	515 (500-1)
<b>C</b> CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024